




# Event Pod System

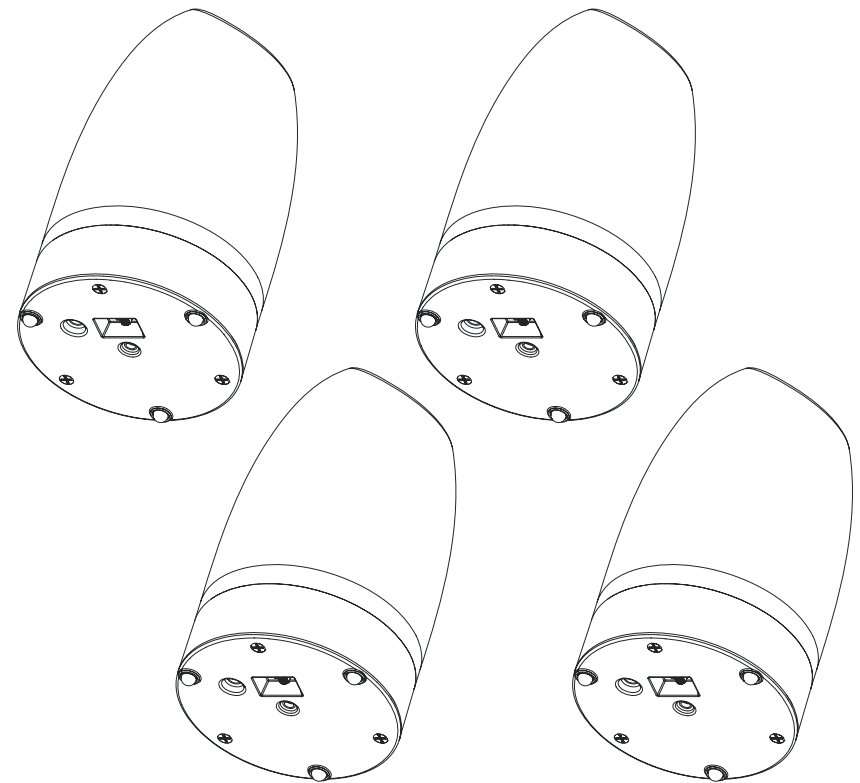

## User Instructions

ADJ Products, LLC  
6122 S. Eastern Ave. Los Angeles, CA 90040 USA  
Tel: 323-582-2650 / Fax: 323-725-6100  
Web: [www.adj.com](http://www.adj.com) / E-mail: [info@adj.com](mailto:info@adj.com)

A.D.J. Supply Europe B.V.  
Junostraat 2  
6468 EW Kerkrade  
The Netherlands

[service@adjgroup.eu](mailto:service@adjgroup.eu) / [www.adj.eu](http://www.adj.eu)  
Tel: +31 45 546 85 00 / Fax: +31 45 546 85 99

Follow Us On:



[facebook.com/americanadj](https://www.facebook.com/americanadj)  
[twitter.com/americanadj](https://twitter.com/americanadj)  
[youtube.com/adjlighting](https://www.youtube.com/adjlighting)

©2013 ADJ Products, LLC all rights reserved. Information, specifications, diagrams, images, and instructions herein are subject to change without notice. ADJ Products, LLC logo and identifying product names and numbers herein are trademarks of ADJ Products, LLC. Copyright protection claimed includes all forms and matters of copyrightable materials and information now allowed by statutory or judicial law or hereinafter granted. Product names used in this document may be trademarks or registered trademarks of their respective companies and are hereby acknowledged. All non-ADJ Products, LLC brands and product names are trademarks or registered trademarks of their respective companies.

**ADJ Products, LLC** and all affiliated companies hereby disclaim any and all liabilities for property, equipment, building, and electrical damages, injuries to any persons, and direct or indirect economic loss associated with the use or reliance of any information contained within this document, and/or as a result of the improper, unsafe, insufficient and negligent assembly, installation, rigging, and operation of this product.

## Technical Specifications:

### **Model: Event Pod System**

<b>Power Supply:</b>	AC 100V/60Hz - 240V50Hz
<b>LEDs:</b>	1 x 0.5W RGB "Tri Color" SMD's
<b>Dimensions:</b>	7" (L) x 3.75" (W) x 3.75" (H)
<b>Colors:</b>	Multitple
<b>Weight:</b>	1 Lbs./0.25 Kgs.
<b>Power Draw:</b>	0.5W (Each Event Pod System)
<b>Charging Time:</b>	2 Hours
<b>Battery Life:</b>	5 Hours (with full charge) Li-ion
<b>Accupack type:</b>	3.7.V 1Ah

**Auto Sensing Voltage:** *The power supply/charger contains an automatic voltage switch, which will auto sense the voltage when it is plugged into the power source.*

**Please Note:** *Specifications and improvements in the design of this unit and this manual are subject to change without any prior written notice.*

**Unpacking:**

Thank you for purchasing the Event Pod System by ADJ Products, LLC. Every Event Pod System has been thoroughly tested and has been shipped in perfect operating condition. Carefully check the shipping carton for damage that may have occurred during shipping. If the carton appears to be damaged, carefully inspect your unit for any damage and be sure all equipment necessary to operate the system has arrived intact. In the event damage has been found or parts are missing, please contact our toll free customer support number for further instructions. Please do not return the unit to your dealer without first contacting customer support.

**Introduction:**

The ADJ Event Pod System is a set of four compact, lithium battery powered lighting fixtures that will add pure lighting excitement to any party atmosphere. These color changing pods feature 8 preset built-in colors and 3 selectable color fade speeds controlled by the ADJ Event-RC hand-held, wireless remote controller.

**Customer Support:**

ADJ Products, LLC provides a toll free customer support line, to provide set up help and to answer any question should you encounter problems during your set up or initial operation. You may also visit us on the web at [www.adj.com](http://www.adj.com) for any comments or suggestions. For service related issue please contact ADJ Products, LLC. Service Hours are Monday through Friday 8:00 a.m. to 4:30 p.m. Pacific Standard Time.

Voice: (800) 322-6337

Fax: (323) 582-2941

E-mail: [support@americandj.com](mailto:support@americandj.com)

**Warning!** To prevent or reduce the risk of electrical shock or fire, do not expose this unit to rain or moisture.

**Caution!** There are no user serviceable parts inside this unit. Do not attempt any repairs yourself, doing so will void your manufacturer's warranty. In the unlikely event your unit may require service please contact ADJ Products, LLC.

***PLEASE recycle the shipping carton whenever possible.***

To optimize the performance of this product, please read these operating instructions carefully to familiarize yourself with the basic operations of this unit. These instructions contain important safety information regarding the use and maintenance of this unit. Please keep this manual with the unit, for future reference.

- Be sure that the local power outlet match that of the required voltage for your unit.
- Do not attempt to remove or break off the ground prong from the electrical cord. This prong is used to reduce the risk of electrical shock and fire in case of an internal short.
- Do not remove the unit cover under any conditions. There are no user serviceable parts inside.
- Never plug this unit in to a dimmer pack
- Always be sure to mount this unit in an area that will allow proper ventilation. Allow about 6" (15cm) between this device and a wall.
- To reduce the risk of electrical shock or fire, do not expose this unit rain or moisture.
- This unit is intended for indoor use only, use of this product outdoors voids all warranties.
- During long periods of non use, disconnect the unit's main power.
- Always mount this unit in safe and stable matter.
- Power-Supply Protection - Power supply/charger cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point where they exit from the fixture.
- Cleaning -The fixture should be cleaned only as recommended by the manufacturer.
- The fixture should be serviced by qualified service personnel when:
  - A. The power supply has been damaged.
  - B. Objects have fallen, or liquid has been spilled into the appliance.
  - C. The appliance has been exposed to rain or water.
  - D. The fixture does not appear to operate normally or exhibits a marked change in performance.

## Event Pod System

## Warranty

### MANUFACTURER'S LIMITED WARRANTY

- A. ADJ Products, LLC hereby warrants, to the original purchaser, ADJ Products, LLC products to be free of manufacturing defects in material and workmanship for a prescribed period from the date of purchase (see specific warranty period on reverse). This warranty shall be valid only if the product is purchased within the United States of America, including possessions and territories. It is the owner's responsibility to establish the date and place of purchase by acceptable evidence, at the time service is sought.
- B. **For warranty service you must obtain a Return Authorization number (RA#) before sending back the product—please contact ADJ Products, LLC Service Department at 800-322-6337.** Send the product only to the ADJ Products, LLC factory. All shipping charges must be pre-paid. If the requested repairs or service (including parts replacement) are within the terms of this warranty, ADJ Products, LLC will pay return shipping charges only to a designated point within the United States. If the entire instrument is sent, it must be shipped in its original package. No accessories should be shipped with the product. If any accessories are shipped with the product, ADJ Products, LLC shall have no liability whatsoever for loss of or damage to any such accessories, nor for the safe return thereof.
- C. This warranty is void if the serial number has been altered or removed; if the product is modified in any manner which ADJ Products, LLC concludes, after inspection, affects the reliability of the product; if the product has been repaired or serviced by anyone other than the ADJ Products, LLC factory unless prior written authorization was issued to purchaser by ADJ Products, LLC; if the product is damaged because not properly maintained as set forth in the instruction manual.
- D. This is not a service contract, and this warranty does not include maintenance, cleaning or periodic check up. During the period specified above, ADJ Products, LLC will replace defective parts at its expense with new or refurbished parts, and will absorb all expenses for warranty service and repair labor by reason of defects in material or workmanship. The sole responsibility of ADJ Products, LLC under this warranty shall be limited to the repair of the product, or replacement thereof, including parts, at the sole discretion of ADJ Products, LLC. All products covered by this warranty were manufactured after August 15, 2012, and bear indentifying marks to that effect.
- E. ADJ Products, LLC reserves the right to make changes in design and/or improvements upon its products without any obligation to include these changes in any products theretofore manufactured.

No warranty, whether expressed or implied, is given or made with respect to any accessory supplied with products described above. Except to the extent prohibited by applicable law, all implied warranties made by ADJ Products, LLC in connection with this product, including warranties of merchantability or fitness, are limited in duration to the warranty period set forth above. And no warranties, whether expressed or implied, including warranties of merchantability or fitness, shall apply to this product after said period has expired. The consumer's and/or Dealer's sole remedy shall be such repair or replacement as is expressly provided above; and under no circumstances shall ADJ Products, LLC be liable for any loss or damage, direct or consequential, arising out of the use of, or inability to use, this product.

This warranty is the only written warranty applicable to ADJ Products, LLC Products and supersedes all prior warranties and written descriptions of warranty terms and conditions heretofore published.

### MANUFACTURER'S LIMITED WARRANTY PERIODS:

- **Lighting Products = 1-year (365 days) Limited Warranty** (Such as: Special Effect Lighting, Intelligent Lighting, UV lighting, Strobes, Fog Machines, Bubble Machines, Mirror Balls, Par Cans, Trussing, Lighting Stands etc. excluding LED and lamps)
- **Laser Products = 90-Day Limited Warranty**
- **L.E.D. Products = 3-year (1095 days) Limited Warranty** (excluding motors, PCB boards, and power supplies, which have a 1-year (365 day Limited Warranty) and batteries which have a 180 day limited warranty). Only the L.E.D.s carry a 3-year warranty

## Event Pod System

## Battery Charging & Operation

### Battery Charging:

The ADJ Event Pod System charger/power supply can be plugged into any power source regardless of the area source voltage. Be sure to only use the charger/power supply that came with the Event Pod System. To recharge the battery, plug the supplied power supply into the input jack on the side of the unit and plug the other end into a matching power source. It takes about 2 hours to reach full charge.

**Note: When unplugging the unit from charging and then applying power via battery, there could be a minimal charge drop.**

### General Operation:

Activate the included remote control using the instructions on the next page to control your Event Pod Systems. Plug this fixture in, and switch on the power or just flip on the power switch and use battery power. Use the included remote control to select your desired color or program. It has been tested at the factory there is no assembly necessary. If there are problems with Event Pod System please contact our toll free customer support number for further instructions. Please do not return the unit to your dealer without first contacting customer support.

## Event Pod System


## Remote Control

**Activating the Remote:** Press the Remote Code Button (5) once, then press the Remote Code Button again within 10 seconds, then press any button on the remote control.

**Erasing the Remote Code:** Press the Remote Code Button (5) for 3 seconds, the unit will turn Red. Once the unit turns Red, press the Remote Code Button again within 3 seconds. If you are successful in erasing the code, the red LED will flash.

## Event Pod System

## Controls

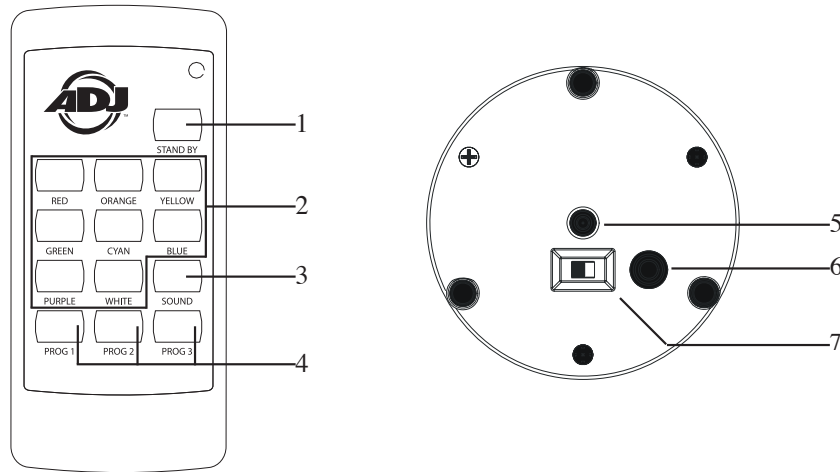

1. Stand By - Pressing this button will blackout the Event Pod System.
2. Color Buttons - Choose 1 of 8 colors to remain static.
3. Sound Active - Press this button to activate sound active mode.
4. Programs 1-3 - Pressing one of these 3 buttons will activate an auto program. The programs are the same, the buttons 1-3 are the different fade speeds. 1 being the slowest fade speed, and 3 being the fastest. Pressing the button once will start the program at the beginning. Press and hold the button for 2 seconds and the program will start at a random spot.
5. Remote Code Button - This button is used to activate the remote and erase the remote code.
6. Sound Sensitivity Adjustment - Use a small flathead screw driver to adjust the sound sensitivity.
7. Power Switch - This switch power the unit on and off.

## Event Pod System

## Warranty Registration

The Event Pod System carries a three year (1095 days) limited warranty. Please fill out the enclosed warranty card to validate your purchase. All returned service items whether under warranty or not, must be freight pre-paid and accompany a return authorization (R.A.) number. The R.A. number must be clearly written on the outside of the return package. A brief description of the problem as well as the R.A. number must also be written down on a piece of paper and included in the shipping container. If the unit is under warranty, you must provide a copy of your proof of purchase invoice. You may obtain a R.A. number by contacting customer support at (800) 322-6337.

## Event Pod System

## Cleaning

### Fixture Cleaning:

Due to fog residue, smoke, and dust cleaning the fixture should be carried out periodically to optimize light output.

1. Use normal glass cleaner and a soft cloth to wipe down the outside casing every 20 days.
2. Always be sure to dry all parts completely before plugging the unit back in.

Cleaning frequency depends on the environment in which the fixture operates (I.e. smoke, fog residue, dust, dew). In heavy use we recommend cleaning on a monthly basis. Periodic cleaning will ensure longevity, and crisp beam output.

## Event Pod System

## Trouble Shooting

Listed below are a few common problems and solutions you should try before contacting customer support.

### LED does not turn on;

1. Make sure the power switch is in the ON position.
2. Make sure the unit is charged when using battery power.

### Remote does not control the unit;

1. Make sure the remote is activated.
2. Erase the remote code and activate the remote once more.